

POLY[®] CONN

Servicing Your Pneumatic Needs For Over 40 Years

METRIC PRODUCTS

EMAIL

insidesales@polyconn.com

WEBSITE

www.polyconn.com

QUESTIONS

(763) 559-0388



TABLE OF CONTENTS

Page 3-4: Polyurethane Tubing

Page 5: Polyethylene Tubing

Page 6: Nylon Tubing

Page 7: Kynar Tubing

Page 8: Fluorinated Ethylene
Propylene - FEP Tubing

Page 9: Static Dissipative Tubing

Page 10: Weld Spatter Tubing

Page 11-13: Stainless Steel
PTC Fittings

Page 14-17: Composite Metric
PTC Fittings

Page 14-17: Composite Transition
PTC Fittings



Features and Specifications for Polyurethane Tubing

Polyurethane has a high resistance to abrasion while being highly flexible and kink resistant. Its most notable quality though is its “memory”. This tubing will stretch and flex but always return to its original shape. It is available in 23 standard colors. This versatile tubing is used for everything from high pressure applications to medical uses to situations where flexibility is key. Depending on durometer and size, Polyconn’s polyurethane tubing can be used with push-in or barbed fittings.



*Special Note - Not all colors pictured above may be available, please call us for availability.

◆denotes color code. To select color by code please refer to Standard Available Colors chart below.

FEATURES

- Naturally clear tubing with a broad resistance to chemicals, water, fuel, oil and fungus.
- Polyurethane has a tensile strength twice that of vinyl tubing and is suitable for air logic applications.
- It is highly flexible, kink resistant with an incredible memory.
- A large range of sizes, colors, configurations, and packaging options to fulfill your needs.

USES

- It is ideal to use barb fittings with Polyurethane 85A and Polyurethane 90A tubing.
- 85A and 90A offer a rubber like feel with no plasticizers to leach or migrate. This ensures a long stable service life.
- Barb and Push to Connect fittings can be used with Polyurethane 95A tubing.

SPECIFICATIONS

| TEMPERATURE RANGE | WORKING PRESSURE | VACUUM RATING | UV STABILIZED |
|---------------------------------|-------------------|---------------|---------------|
| -40°F - 165°F (-40°C - 74°C) | 3:1 Safety Factor | To -28" Hg | Yes |

POLYURETHANE TUBING

| Part # | OD | ID | Wall | Standard Colors | Working Pressure | | Bend Radius | List Price | PKG QTY | Pkg Price |
|---------------|-------|--------|---------|---|------------------|---------|-------------|------------|---------|-----------|
| | | | | | @ 75°F | @ 150°F | | | | |
| PCUM-3F-◆ | 3 mm | 1.8 mm | .6 mm | ① ② | 230 PSI | 90 PSI | 6.4 mm | \$ 0.22 | 100' | \$ 21.71 |
| PCUM-3F-◆-R | | | | | | | | \$ 0.16 | 500' | \$ 79.60 |
| PCUM-3F-◆-XR | | | | | | | | \$ 0.14 | 2500' | \$ 350.00 |
| PCUM-4F-◆ | 4 mm | 2.4 mm | .8 mm | ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑮ ⑲ ⑳ ㉑ ㉒ ㉓ | 210 PSI | 85 PSI | 9.5 mm | \$ 0.26 | 100' | \$ 26.08 |
| PCUM-4F-◆-R | | | | | | | | \$ 0.22 | 500' | \$ 111.15 |
| PCUM-4F-◆-LR | | | | | | | | \$ 0.20 | 1000' | \$ 203.20 |
| PCUM-4F-◆-XR | | | | | | | | \$ 0.19 | 2500' | \$ 463.75 |
| PCUM-6F-◆ | 6 mm | 4 mm | 1 mm | ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑮ ⑲ ㉑ ㉒ ㉓ ㉔ | 160 PSI | 65 PSI | 12.7 mm | \$ 0.46 | 100' | \$ 46.06 |
| PCUM-6F-◆-R | | | | | | | | \$ 0.42 | 500' | \$ 211.00 |
| PCUM-6F-◆-LR | | | | | | | | \$ 0.39 | 1000' | \$ 385.30 |
| PCUM-8F-◆ | 8 mm | 5 mm | 1.5 mm | ① ② ③ ④ ⑤ ⑥ ⑨ ㉑ ㉒ | 190 PSI | 75 PSI | 19 mm | \$ 0.82 | 100' | \$ 82.32 |
| PCUM-8F-◆-R | | | | | | | | \$ 0.73 | 500' | \$ 364.40 |
| PCUM-10F-◆-50 | 10 mm | 6.5 mm | 1.75 mm | ① ② ③ ④ ⑤ ⑥ ㉑ | 170 PSI | 70 PSI | 22.2 mm | \$ 1.12 | 50' | \$ 56.23 |
| PCUM-10F-◆-R | | | | | | | | \$ 1.01 | 500' | \$ 505.35 |
| PCUM-12F-◆-50 | 12 mm | 8 mm | 2 mm | ① ② ③ ④ ⑥ ㉑ | 155 PSI | 60 PSI | 28.6 mm | \$ 1.66 | 50' | \$ 82.76 |
| PCUM-12F-◆-SR | | | | | | | | \$ 1.54 | 250' | \$ 384.88 |
| PCUM-16F-◆-50 | 16 mm | 11 mm | 2.5 mm | ② | 150 PSI | 60 PSI | 76.2 mm | \$ 3.94 | 50' | \$ 197.05 |
| PCUM-16F-◆-R | | | | | | | | \$ 3.49 | 200' | \$ 697.12 |

NOTES:

Features and Specifications for Polyethylene Tubing

Linear Low Density Polyethylene or LLDPE's greatest advantage over any other low density polyethylene is its superior environmental stress crack resistance (ESCR). Environmental stresses that can shorten the service life of tubing includes: chemical exposure, aging, connection to barb-type fittings, or high vibration connections with compression fittings. All colors comply with FDA regulation 21 CFR 177.1520(c) for food contact applications.



*Special Note - Not all colors pictured above may be available, please call us for availability.

◆denotes color code. To select color by code please refer to Standard Available Colors chart below.

FEATURES

- Greater tensile strength.
- High burst pressure.
- Superior stress and crack resistance.
- Tasteless and odorless.
- Puncture resistance.
- Impermeable to some gasses and moisture.
- Superior dielectric properties.
- Lightweight.

USES

- Push to Connect and Compression fittings can be used with Polyethylene.

SPECIFICATIONS

| TEMPERATURE RANGE | WORKING PRESSURE | VACUUM RATING | HARDNESS |
|---------------------------------|-------------------|---------------|------------|
| -40°F - 150°F (-40°C - 66°C) | 3:1 Safety Factor | To -28" Hg | 50 Shore D |

POLYETHYLENE TUBING

| Part # | OD | ID | Wall | Standard Colors | Working Pressure | | Bend Radius | List Price | PKG QTY | Pkg Price |
|----------------|-------|--------|--------|-----------------|------------------|---------|-------------|------------|---------|-----------|
| | | | | | @ 75°F | @ 150°F | | | | |
| PCEM-4PG-◆ | 4 mm | 2.7 mm | .65 mm | ① ② ③ ④ ⑤ ⑥ | 175 PSI | 70 PSI | 25.2 mm | \$ 0.23 | 100' | \$ 22.66 |
| PCEM-4PG-◆-R | | | | | | | | \$ 0.21 | 500' | \$ 103.80 |
| PCEM-4PG-◆-LR | | | | | | | | \$ 0.19 | 1000' | \$ 188.80 |
| PCEM-6PG-◆ | 6 mm | 4 mm | 1 mm | ① ② ④ | 175 PSI | 70 PSI | 31.8 mm | \$ 0.23 | 100' | \$ 22.84 |
| PCEM-6PG-◆-R | | | | | | | | \$ 0.21 | 500' | \$ 105.55 |
| PCEM-6PG-◆-LR | | | | | | | | \$ 0.19 | 1000' | \$ 190.60 |
| PCEM-8PG-◆ | 8 mm | 6 mm | 1 mm | ① ② ③ ④ | 140 PSI | 55 PSI | 38 mm | \$ 0.29 | 100' | \$ 29.19 |
| PCEM-8PG-◆-R | | | | | | | | \$ 0.25 | 500' | \$ 127.05 |
| PCEM-10PG-◆ | 10 mm | 8 mm | 1 mm | ① ② ④ | 115 PSI | 45 PSI | 51 mm | \$ 0.38 | 100' | \$ 37.77 |
| PCEM-10PG-◆-R | | | | | | | | \$ 0.34 | 500' | \$ 169.05 |
| PCEM-12PG-◆ | 12 mm | 9 mm | 1.5 mm | ① ② ④ | 135 PSI | 55 PSI | 63 mm | \$ 0.56 | 100' | \$ 56.31 |
| PCEM-12PG-◆-SR | | | | | | | | \$ 0.51 | 250' | \$ 126.55 |
| PCEM-12PG-◆-R | | | | | | | | \$ 0.49 | 500' | \$ 242.90 |

Features and Specifications for Nylon Tubing

Nylon tubing can withstand higher temperatures, making it an ideal choice for a wide variety of applications. When compared to other Nylon resins this tubing allows for a lighter weight wall, greater flexibility and smaller bend radius. It is also more corrosion resistant than other types of Nylon tubing because of its resistance moisture absorption. It's heat and UV stabilization makes it resistant to stress-cracking, so it works well in sunny areas. It is chemical resistant which makes it a good choice in areas where exposure to certain chemicals is a possibility.



*Special Note - Not all colors pictured above may be available, please call us for availability.

◆denotes color code. To select color by code please refer to Standard Available Colors chart below.

FEATURES

- Strong, lightweight and flexible.
- Dimensionally stable.
- Heat and light stable.
- Resistant to corrosion and stress cracking.

USES

- Push to Connect and Compression fittings can be used with Nylon tubing.

SPECIFICATIONS

| TEMPERATURE RANGE | WORKING PRESSURE | VACUUM RATING | HARDNESS |
|---------------------------------|-------------------|---------------|---------------|
| -60°F - 200°F (-51°C - 93°C) | 4:1 Safety Factor | To -28" Hg | 78 Rockwell R |

NYLON TUBING

| Part # | OD | ID | Wall | Standard Colors | Working Pressure | | Bend Radius | List Price | PKG QTY | Pkg Price |
|--------------|-------|--------|--------|-----------------|------------------|---------|-------------|------------|-----------|-----------|
| | | | | | @ 75°F | @ 150°F | | | | |
| PCNM-4N-◆ | 4 mm | 2.7 mm | .65 mm | ① ② ③ ④ ⑤ | 350 PSI | 210 PSI | 12.7 mm | \$ 0.27 | 100' | \$ 27.02 |
| PCNM-4N-◆-R | | | | ⑥ ⑦ ⑪ ⑬ | | | | \$ 0.24 | 500' | \$ 121.05 |
| PCNM-4N-◆-LR | | | | \$ 0.14 | | | | 1000' | \$ 236.40 | |
| PCNM-5N-◆ | 5 mm | 3 mm | 1 mm | ① ② ③ ④ ⑤ ⑥ | 420 PSI | 250 PSI | 9.5 mm | \$ 0.47 | 100' | \$ 46.89 |
| PCNM-6N-◆ | 6 mm | 4 mm | 1 mm | ① ② ③ ④ ⑤ ⑥ ⑦ | 340 PSI | 200 PSI | 17 mm | \$ 0.55 | 100' | \$ 55.15 |
| PCNM-6N-◆-R | | | | | | | | \$ 0.53 | 500' | \$ 262.60 |
| PCNM-6N-◆-LR | | | | | | | | \$ 0.47 | 1000' | \$ 474.70 |
| PCNM-8N-◆ | 8 mm | 6 mm | 1 mm | ① ② ③ ④ ⑤ ⑥ | 250 PSI | 150 PSI | 38 mm | \$ 0.75 | 100' | \$ 75.04 |
| PCNM-8N-◆-R | | | | | | | | \$ 0.67 | 500' | \$ 336.70 |
| PCNM-10N-◆ | 10 mm | 8 mm | 1 mm | ① ② ⑬ | 190 PSI | 110 PSI | 51 mm | \$ 0.96 | 100' | \$ 96.22 |
| PCNM-10N-◆-R | | | | | | | | \$ 0.87 | 500' | \$ 432.50 |
| PCNM-12N-◆ | 12 mm | 10 mm | 1 mm | ① ② | 150 PSI | 90 PSI | 63 mm | \$ 1.17 | 100' | \$ 116.68 |

Features and Specifications for Kynar PVDF Tubing

Kynar® PVDF compound is an economical alternative to Teflon (PTFE, PFA, and FEP) tubing for applications not requiring heat resistance. Kynar® possesses excellent resistance to a wide range of chemicals. The high purity material is the ideal tubing for a variety of applications requiring an odorless and tasteless tube.



FEATURES

- Resists: Acids, Alcohol, Aliphatics, Aromatics, Chloride, Fungus, Mild Bases, Out-gassing, Radiation, and UV Light.
- Sterilizable by Gamma Radiation or Ozone.
- Resists fungal growth per MS 810B, Method 508 testing.

USES

- Well suited for medical, pharmaceutical, food & beverage, deionized water systems, semiconductor processing, wastewater treatment, pulp & paper bleaching.

SPECIFICATIONS

| TEMPERATURE RANGE | WORKING PRESSURE | VACUUM RATING | HARDNESS |
|---------------------------------|-------------------|---------------|------------|
| -40°F - 180°F (-40°C - 82°C) | 4:1 Safety Factor | To -28" Hg | 65 Shore D |

KYNAR PVDF TUBING

| Part # | OD | ID | Wall | Standard Colors | Working Pressure | | Bend Radius | List Price | PKG QTY | Pkg Price |
|-------------|------|------|------|-----------------|------------------|---------|-------------|------------|---------|-----------|
| | | | | | @ 75°F | @ 150°F | | | | |
| PCKM-6K-0 | 6 mm | 4 mm | 1 mm | | 195 PSI | 115 PSI | 15.9 mm | \$ 1.63 | 100' | \$ 163.40 |
| PCKM-6K-0-R | | | | | | | | \$ 1.60 | 500' | \$ 798.85 |

Features and Specifications for Fluorinated Ethylene Propylene - FEP Tubing

FEP tubing is one of the most durable and versatile flexible plastic tubes that you can buy. FEP, or fluorinated ethylene propylene, is an economical choice for applications requiring chemical resistance or exposure to a wide range of temperatures. FEP is extremely flexible, making it an ideal choice for self-retracting coils.



FEATURES

- 100% virgin grade high performance resin designed to resist stress cracking.
- Low permeability.
- High thermal stability and UV resistant.
- Non-flammable/Self-extinguishing.
- Superior electrical insulation properties.
- Chemically inert to most industrial chemicals and solvents.

USES

- Chemical Processing
- Laboratory applications
- Medical devices
- Water purification
- Food processing
- Automotive paint spray

SPECIFICATIONS

| TEMPERATURE RANGE | WORKING PRESSURE | VACUUM RATING | HARDNESS |
|-----------------------------------|-------------------|---------------|------------|
| -100°F - 400°F (-73°C - 204°C) | 5:1 Safety Factor | To -28" Hg | 57 Shore D |

FEP TUBING

| Part # | OD | ID | Wall | Standard Colors | Working Pressure @ 75°F | Bend Radius | List Price | PKG QTY | Pkg Price |
|---------------|-------|------|------|-----------------|-------------------------|-------------|------------|---------|-------------|
| PCFM-4P-0 | 4 mm | 2 mm | 1 mm | | 450 PSI | 1.5" | \$ 2.43 | 100' | \$ 243.35 |
| PCFM-4P-0-LR | | | | | | | \$ 2.41 | 1000' | \$ 2,406.90 |
| PCFM-4P-0-XR | | | | | | | \$ 2.37 | 2500' | \$ 5,925.25 |
| PCFM-6P-0 | 6 mm | 4 mm | 1 mm | | 301 PSI | 1" | \$ 2.95 | 100' | \$ 295.47 |
| PCFM-6P-0-R | | | | | | | \$ 2.94 | 500' | \$ 1,468.85 |
| PCFM-6P-0-XR | | | | | | | \$ 2.91 | 2500' | \$ 7,268.25 |
| PCFM-8P-0 | 8 mm | 6 mm | 1 mm | | 225 PSI | 2.5" | \$ 3.74 | 100' | \$ 373.52 |
| PCFM-8P-0-LR | | | | | | | \$ 3.67 | 1500' | \$ 5,498.70 |
| PCFM-10P-0 | | | | | | | \$ 4.88 | 100' | \$ 488.24 |
| PCFM-10P-0-LR | 10 mm | 8 mm | 1 mm | | 125 PSI | 2.75" | \$ 4.82 | 1500' | \$ 7,228.80 |

Features and Specifications for Static Dissipative Tubing

Static electricity is a stationary charge of electricity resting on an object's surface. With plastic tubing, the charge is usually generated by friction on the exterior or interior of the tubing. The charge is typically localized. This means that a charge may exist on one part of the tube but not the entire tube. The spotty nature of the charge makes it much harder to detect. Furthermore, humans can only sense electrostatic discharge (ESD) greater than 3,500 electrostatic volts. A charge as low as 100 ESD volts can damage certain circuits meaning that electronics can be destroyed by ESD without the person even knowing it.

Static Dissipative Polyurethane tubing is made from an ether-based polyurethane that is specially formulated to help control ESD. It should always be used in low humidity environments or when tubing is going to be near circuit boards.



*Special Note - Not all colors pictured above may be available, please call us for availability.

◆ denotes color code. To select color by code please refer to Standard Available Colors chart below.

FEATURES

- Dissipates electrostatic charges with no chemical additives.
- Contains no conductive fillers and no particle emission.
- Dissipative values are permanent and cannot be washed away.
- Non-Contaminating and non-outgassing.
- Ideal for low humidity environments.
- Non-corrosive to electronic leads and components.

USES

- Barb fittings are the suggested fittings to use with the static dissipative polyurethane tubing.

SPECIFICATIONS

| TEMPERATURE RANGE | WORKING PRESSURE | VACUUM RATING | UV STABILIZED |
|---------------------------------|-------------------|---------------|---------------|
| -40°F - 165°F (-40°C - 73°C) | 3:1 Safety Factor | To -28" Hg | Yes |

STATIC DISSIPATIVE TUBING

| Part # | OD | ID | Wall | Standard Colors | Working Pressure | | Bend Radius | List Price | PKG QTY | Pkg Price |
|-----------------|-------|--------|--------|-----------------|------------------|---------|-------------|------------|---------|-----------|
| | | | | | @ 75°F | @ 150°F | | | | |
| PCUM-4SDT-◆ | 4 mm | 2.4 mm | 0.8 mm | 2 3 4 7 10 | 105 PSI | 50 PSI | 9.5 mm | \$ 0.52 | 100' | \$ 52.37 |
| PCUM-6SDT-◆-LR | 6 mm | 4 mm | 1 mm | 2 4 7 9 | 90 PSI | 45 PSI | 12.7 mm | \$ 0.85 | 1000' | \$ 847.50 |
| PCUM-8SDT-◆-R | 8 mm | 5 mm | 1.5 mm | 2 4 | 100 PSI | 50 PSI | 19 mm | \$ 1.51 | 500' | \$ 757.45 |
| PCUM-12SDT-◆-SR | 12 mm | 8 mm | 2 mm | 2 | 90 PSI | 45 PSI | 28.6 mm | \$ 3.05 | 250' | \$ 762.75 |

Features and Specifications for Weld Spatter Tubing

Weld-Spatter Resistant tubing is made by taking blue 95A durometer polyurethane tubing and jacketing it with a specially formulated weld-spatter resistant cover. The result is a jacketed tube that resists incidental weld spatter contact. The outer cover base resin meets UL94V0 requirements and offers strong insulating properties. It also resists oils, greases, acids, bases, aqueous solutions, ozone, heat-aging and ultraviolet light. The cover is approximately .030" thick and does not adhere to the inner tube, allowing the jacket to be easily skived back for fitting connection with conventional compression or push to connect fittings.



*Special Note - Not all colors pictured above may be available, please call us for availability.

◆denotes color code. To select color by code please refer to Standard Available Colors chart below.

FEATURES

- Protects tube from incidental weld spatter contact.
- Flexible with an excellent bend radius.
- Resistant to kink damage.
- Broad range of chemical resistance.

USES

- Ideal for use on machine tools, pneumatic plumbing systems, water and air lines on automatic or spot welders.
- Push to connect, compression, and barb fittings are the suggested fittings to use.

SPECIFICATIONS

| TEMPERATURE RANGE | WORKING PRESSURE | VACUUM RATING | RESIN COMPLIANCE |
|---------------------------------|-------------------|---------------|--|
| -40°F - 165°F (-40°C - 73°C) | 3:1 Safety Factor | To -28" Hg | Outer Jacket: UL94V0 Inner Tube: UL94HB |

WELD SPATTER TUBING

| Part # | OD | ID | Standard Colors | Working Pressure | | Bend Radius | List Price | PKG QTY | Pkg Price |
|-----------------|-------|--------|-----------------|------------------|---------|-------------|------------|---------|-------------|
| | | | | @ 75°F | @ 150°F | | | | |
| PCUM-6WSR-◆ | 6 mm | 4 mm | ◆ | 160 PSI | 65 PSI | 12.7 mm | \$ 1.79 | 100' | \$ 178.97 |
| PCUM-6WSR-◆-SR | | | | | | | \$ 1.75 | 250' | \$ 437.40 |
| PCUM-8WSR-◆ | 8 mm | 5 mm | ◆ ◆ ◆ | 190 PSI | 75 PSI | 19 mm | \$ 2.07 | 100' | \$ 206.65 |
| PCUM-8WSR-◆-R | | | | | | | \$ 1.99 | 500' | \$ 993.45 |
| PCUM-10WSR-◆ | 10 mm | 6.5 mm | ◆ ◆ | 170 PSI | 70 PSI | 22.2 mm | \$ 2.44 | 100' | \$ 244.47 |
| PCUM-10WSR-◆-R | | | | | | | \$ 2.37 | 500' | \$ 1,182.55 |
| PCUM-12WSR-◆-50 | 12 mm | 8 mm | ◆ | 155 PSI | 60 PSI | 28.66 mm | \$ 3.68 | 50' | \$ 183.84 |
| PCUM-12WSR-◆-SR | | | | | | | \$ 3.60 | 250' | \$ 899.78 |

Features and Specifications for Stainless Steel Push to Connect Fittings

This stainless steel line is a great choice to use when acetal, brass, and or nickel plated brass fittings can not be used. The 316 stainless steel that is used in these fittings is designed to withstand corrosive environments or substances, to channel agresive fluids and to be used in the food, pharmaceutical and chemical industries. These fittings come with Viton O-Ring to guarantee the best performance.

SPECIFICATIONS

| TEMPERATURE RANGE | PRESSURE RATING | VACUUM RATING |
|---------------------------------|-----------------|---------------|
| -4°F - 356°F (-20°C - 180°C) | 250 PSI | To -30" Hg |



PLUG



| Part # | Push-In | QTY | List Price |
|----------------|---------|-----|------------|
| PC59SSM-6-316 | 6 mm | 1 | \$ 2.59 |
| PC59SSM-10-316 | 10 mm | 1 | \$ 2.59 |
| PC59SSM-12-316 | 12 mm | 1 | \$ 2.59 |

UNION TUBE



| Part # | Push-In | QTY | List Price |
|----------------|---------|-----|------------|
| PC62SSM-4-316 | 4 mm | 1 | \$ 16.12 |
| PC62SSM-6-316 | 6 mm | 1 | \$ 16.10 |
| PC62SSM-8-316 | 8 mm | 1 | \$ 17.55 |
| PC62SSM-10-316 | 10 mm | 1 | \$ 19.01 |
| PC62SSM-12-316 | 12 mm | 1 | \$ 23.03 |

UNION TEE



| Part # | Push-In | QTY | List Price |
|----------------|---------|-----|------------|
| PC64SSM-4-316 | 4 mm | 1 | \$ 31.42 |
| PC64SSM-6-316 | 6 mm | 1 | \$ 36.12 |
| PC64SSM-8-316 | 8 mm | 1 | \$ 40.78 |
| PC64SSM-10-316 | 10 mm | 1 | \$ 45.41 |
| PC64SSM-12-316 | 12 mm | 1 | \$ 53.12 |

UNION TEE



| Part # | Push-In | QTY | List Price |
|----------------|---------|-----|------------|
| PC65SSM-4-316 | 4 mm | 1 | \$ 25.60 |
| PC65SSM-6-316 | 6 mm | 1 | \$ 29.41 |
| PC65SSM-8-316 | 8 mm | 1 | \$ 30.74 |
| PC65SSM-10-316 | 10 mm | 1 | \$ 33.53 |
| PC65SSM-12-316 | 12 mm | 1 | \$ 38.57 |

FEMALE CONNECTOR



| Part # | Push-In | BSPT F | QTY | List Price |
|-----------------|---------|--------|-----|------------|
| PC66SSM-4M5-316 | 4 mm | M5 | 1 | \$ 13.04 |
| PC66SSM-42R-316 | 4 mm | 1/8" | 1 | \$ 13.04 |
| PC66SSM-44R-316 | 4 mm | 1/4" | 1 | \$ 13.04 |
| PC66SSM-6M5-316 | 6 mm | M5 | 1 | \$ 13.04 |
| PC66SSM-62R-316 | 6 mm | 1/8" | 1 | \$ 13.04 |
| PC66SSM-64R-316 | 6 mm | 1/4" | 1 | \$ 13.04 |
| PC66SSM-84R-316 | 8 mm | 1/4" | 1 | \$ 16.75 |
| PC66SSM-86R-316 | 8 mm | 3/8" | 1 | \$ 18.42 |
| PC66SSM-104R316 | 10 mm | 1/4" | 1 | \$ 20.12 |
| PC66SSM-106R316 | 10 mm | 3/8" | 1 | \$ 21.48 |
| PC66SSM-126R316 | 12 mm | 3/8" | 1 | \$ 22.50 |
| PC66SSM-128R316 | 12 mm | 1/2" | 1 | \$ 25.89 |

MALE CONNECTOR



| Part # | Push-In | BSPT F | QTY | List Price |
|-----------------|---------|--------|-----|------------|
| PC68SSM-4M5-316 | 4 mm | M5 | 1 | \$ 11.18 |
| PC68SSM-42R-316 | 4 mm | 1/8" | 1 | \$ 11.18 |
| PC68SSM-44R-316 | 4 mm | 1/4" | 1 | \$ 12.87 |
| PC68SSM-6M5-316 | 6 mm | M5 | 1 | \$ 12.87 |
| PC68SSM-62R-316 | 6 mm | 1/8" | 1 | \$ 12.87 |
| PC68SSM-64R-316 | 6 mm | 1/4" | 1 | \$ 12.87 |
| PC68SSM-84R-316 | 8 mm | 1/4" | 1 | \$ 14.88 |
| PC68SSM-86R-316 | 8 mm | 3/8" | 1 | \$ 15.71 |
| PC68SSM-104R316 | 10 mm | 1/4" | 1 | \$ 14.88 |
| PC68SSM-106R316 | 10 mm | 3/8" | 1 | \$ 15.10 |
| PC68SSM-126R316 | 12 mm | 3/8" | 1 | \$ 18.23 |
| PC68SSM-128R316 | 12 mm | 1/2" | 1 | \$ 24.05 |

MALE ELBOW SWIVEL



| Part # | Push-In | BSPT F | QTY | List Price |
|-----------------|---------|--------|-----|------------|
| PC69SSM-4M5-316 | 4 mm | M5 | 1 | \$ 22.23 |
| PC69SSM-42R-316 | 4 mm | 1/8" | 1 | \$ 22.23 |
| PC69SSM-44R-316 | 4 mm | 1/4" | 1 | \$ 22.23 |
| PC69SSM-6M5-316 | 6 mm | M5 | 1 | \$ 25.60 |
| PC69SSM-62R-316 | 6 mm | 1/8" | 1 | \$ 23.68 |
| PC69SSM-64R-316 | 6 mm | 1/4" | 1 | \$ 25.60 |
| PC69SSM-84R-316 | 8 mm | 1/4" | 1 | \$ 28.41 |
| PC69SSM-86R-316 | 8 mm | 3/8" | 1 | \$ 28.61 |
| PC69SSM-104R316 | 10 mm | 1/4" | 1 | \$ 29.62 |
| PC69SSM-106R316 | 10 mm | 3/8" | 1 | \$ 30.74 |
| PC69SSM-126R316 | 12 mm | 3/8" | 1 | \$ 37.79 |
| PC69SSM-128R316 | 12 mm | 1/2" | 1 | \$ 43.03 |

TEE RUN SWIVEL



| Part # | Push-In | BSPT F | QTY | List Price |
|-----------------|---------|--------|-----|------------|
| PC71SSM-4M5-316 | 4 mm | M5 | 1 | \$ 31.42 |
| PC71SSM-42R-316 | 4 mm | 1/8" | 1 | \$ 31.42 |
| PC71SSM-44R-316 | 4 mm | 1/4" | 1 | \$ 31.42 |
| PC71SSM-6M5-316 | 6 mm | M5 | 1 | \$ 31.42 |
| PC71SSM-62R-316 | 6 mm | 1/8" | 1 | \$ 31.42 |
| PC71SSM-64R-316 | 6 mm | 1/4" | 1 | \$ 36.12 |
| PC71SSM-84R-316 | 8 mm | 1/4" | 1 | \$ 39.49 |
| PC71SSM-86R-316 | 8 mm | 3/8" | 1 | \$ 42.91 |
| PC71SSM-104R316 | 10 mm | 1/4" | 1 | \$ 45.41 |
| PC71SSM-106R316 | 10 mm | 3/8" | 1 | \$ 45.41 |
| PC71SSM-126R316 | 12 mm | 3/8" | 1 | \$ 53.12 |
| PC71SSM-128R316 | 12 mm | 1/2" | 1 | \$ 53.12 |

Features and Specifications for Composite Metric Push to Connect Fittings

Our metric composite fittings can be used in a variety of applications such as industrial, robotics, machinery, mobile and instrumentation. Polyconn offers a broad range of metric composite push-in pneumatic fittings. The metric composite fittings, offer a way to connect tubing quickly and easily with no need for tools.

Polyconn's CB composite fittings use a stainless-steel gripping-ring to grip nylon, 95 durometer polyurethane and polyethylene tubing. The nickel plated brass components on the fittings help to provide corrosion resistance and assist in prolonging the life of the fitting. All of the tapered threads come with pre-applied thread sealant and our parallel threads come with a recessed captive o-ring.

The advanced design of the Polyconn push-in fitting places more gripper teeth in the fitting that are independent of the collet. This superior method allows the collet to guide and center the tubing into the fitting teeth on connection. When the need arises to disconnect, simply depress the collet which slides down and pushes the teeth entirely out of the way, disengaging the tubing completely.

SPECIFICATIONS


| TEMPERATURE RANGE | PRESSURE RANGE | VACUUM RATING |
|------------------------------|----------------|---------------|
| 32°F - 140°F (0°C - 60°C) | 0 - 150 PSI | TO -29.5" Hg |

FEATURES

- Collet detents fully retracting gripper teeth.
- An oval collet makes it easier to disengage tubing.
- Custom colored collets available upon request.
- Body material nickel plated brass and black PBT (Polybutylene).
- Locking ring stainless steel.
- O-Ring NBR
- Working pressure 150 PSI.
- Pre-applied thread sealant.

USES

- Industrial
- Robotics
- Machinery
- Mobile
- Instrumentation

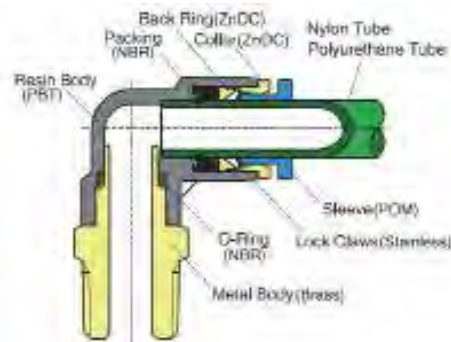

UNION Y



| Part # | Push-In | List Price | QTY | Pkg Price |
|------------|---------|------------|-----|-----------|
| PC45CBM-4 | 4 MM | \$ 1.17 | 5 | \$ 5.85 |
| PC45CBM-6 | 6 MM | \$ 1.17 | 5 | \$ 5.85 |
| PC45CBM-8 | 8 MM | \$ 1.17 | 5 | \$ 5.85 |
| PC45CBM-12 | 12 MM | \$ 2.05 | 5 | \$ 10.22 |

UNION Y REDUCER



| Part # | PI A | PI B | List Price | QTY | Pkg Price |
|-------------|------|------|------------|-----|-----------|
| PC45CBMR-46 | 4 MM | 6 MM | \$ 1.78 | 5 | \$ 8.89 |
| PC45CBMR-68 | 6 MM | 8 MM | \$ 1.68 | 5 | \$ 8.40 |

PLUG



| Part # | Push-In | List Price | QTY | Pkg Price |
|------------|---------|------------|-----|-----------|
| PC59CBM-4 | 4 MM | \$ 0.56 | 5 | \$ 2.81 |
| PC59CBM-6 | 6 MM | \$ 0.56 | 5 | \$ 2.81 |
| PC59CBM-8 | 8 MM | \$ 0.66 | 5 | \$ 3.28 |
| PC59CBM-10 | 10 MM | \$ 0.89 | 5 | \$ 4.44 |
| PC59CBM-12 | 12 MM | \$ 1.03 | 5 | \$ 5.15 |

UNION TUBE



| Part # | Push-In | List Price | QTY | Pkg Price |
|------------|---------|------------|-----|-----------|
| PC62CBM-4 | 4 MM | \$ 0.84 | 5 | \$ 4.21 |
| PC62CBM-6 | 6 MM | \$ 0.89 | 5 | \$ 4.44 |
| PC62CBM-8 | 8 MM | \$ 1.08 | 5 | \$ 5.38 |
| PC62CBM-10 | 10 MM | \$ 1.36 | 5 | \$ 6.78 |
| PC62CBM-12 | 12 MM | \$ 1.56 | 5 | \$ 7.72 |
| PC62CBM-16 | 16 MM | \$ 3.51 | 5 | \$ 17.57 |

UNION TUBE REDUCER



| Part # | PI A | PI B | List Price | QTY | Pkg Price |
|--------------|------|-------|------------|-----|-----------|
| PC62CBMR-46 | 4 MM | 6 MM | \$ 0.98 | 5 | \$ 4.91 |
| PC62CBMR-68 | 6 MM | 8 MM | \$ 1.22 | 5 | \$ 6.08 |
| PC62CBMR-810 | 8 MM | 10 MM | \$ 1.40 | 5 | \$ 7.02 |

UNION TEE



| Part # | Push-In | List Price | QTY | Pkg Price |
|------------|---------|------------|-----|-----------|
| PC64CBM-4 | 4 MM | \$ 1.26 | 5 | \$ 6.32 |
| PC64CBM-6 | 6 MM | \$ 1.26 | 5 | \$ 6.32 |
| PC64CBM-8 | 8 MM | \$ 1.31 | 5 | \$ 6.55 |
| PC64CBM-10 | 10 MM | \$ 1.82 | 5 | \$ 9.12 |
| PC64CBM-12 | 12 MM | \$ 2.20 | 5 | \$ 10.99 |
| PC64CBM-16 | 16 MM | \$ 4.70 | 5 | \$ 23.51 |

UNION ELBOW



| Part # | Push-In | List Price | QTY | Pkg Price |
|------------|---------|------------|-----|-----------|
| PC65CBM-4 | 4 MM | \$ 0.84 | 5 | \$ 4.21 |
| PC65CBM-6 | 6 MM | \$ 0.89 | 5 | \$ 4.44 |
| PC65CBM-8 | 8 MM | \$ 1.12 | 5 | \$ 5.61 |
| PC65CBM-10 | 10 MM | \$ 1.36 | 5 | \$ 6.78 |
| PC65CBM-12 | 12 MM | \$ 1.54 | 5 | \$ 7.72 |
| PC65CBM-16 | 16 MM | \$ 4.81 | 5 | \$ 24.07 |

METRIC MALE CONNECTOR



| Part # | Push-In | M Thread | List Price | QTY | Pkg Price |
|--------------|---------|----------|------------|-----|-----------|
| PC68CBM-04M5 | 4 MM | M 5 | \$ 0.90 | 5 | \$ 4.51 |
| PC68CBM-04M6 | 4 MM | M 6 | \$ 0.94 | 5 | \$ 4.68 |
| PC68CBM-06M5 | 6 MM | M 5 | \$ 1.10 | 5 | \$ 5.52 |
| PC68CBM-06M6 | 6 MM | M 6 | \$ 1.23 | 5 | \$ 6.14 |

**MALE CONNECTOR
MM X BSPP**



| Part # | Push-In | BSPP | List Price | QTY | Pkg Price |
|--------------|---------|------|------------|-----|-----------|
| PC68CBM-42G | 4 MM | 1/8" | \$ 1.10 | 5 | \$ 5.50 |
| PC68CBM-44G | 4 MM | 1/4" | \$ 1.68 | 5 | \$ 8.40 |
| PC68CBM-62G | 6 MM | 1/8" | \$ 1.22 | 5 | \$ 6.08 |
| PC68CBM-64G | 6 MM | 1/4" | \$ 1.73 | 5 | \$ 8.66 |
| PC68CBM-66G | 6 MM | 3/8" | \$ 2.36 | 5 | \$ 11.79 |
| PC68CBM-68G | 6 MM | 1/2" | \$ 3.83 | 5 | \$ 19.13 |
| PC68CBM-82G | 8 MM | 1/8" | \$ 1.62 | 5 | \$ 8.12 |
| PC68CBM-84G | 8 MM | 1/4" | \$ 1.59 | 5 | \$ 7.95 |
| PC68CBM-86G | 8 MM | 3/8" | \$ 2.36 | 5 | \$ 11.79 |
| PC68CBM-88G | 8 MM | 1/2" | \$ 4.14 | 5 | \$ 20.70 |
| PC68CBM-102G | 10 MM | 1/8" | \$ 2.31 | 5 | \$ 11.53 |
| PC68CBM-104G | 10 MM | 1/4" | \$ 2.36 | 5 | \$ 11.79 |
| PC68CBM-106G | 10 MM | 3/8" | \$ 2.47 | 5 | \$ 12.33 |
| PC68CBM-108G | 10 MM | 1/2" | \$ 3.83 | 5 | \$ 19.13 |

**MALE CONNECTOR
MM X BSPT**



| Part # | Push-In | BSPT | List Price | QTY | Pkg Price |
|--------------|---------|------|------------|-----|-----------|
| PC68CBM-42R | 4 MM | 1/8" | \$ 0.94 | 5 | \$ 4.68 |
| PC68CBM-44R | 4 MM | 1/4" | \$ 1.47 | 5 | \$ 7.35 |
| PC68CBM-62R | 6 MM | 1/8" | \$ 1.10 | 5 | \$ 5.52 |
| PC68CBM-64R | 6 MM | 1/4" | \$ 1.54 | 5 | \$ 7.72 |
| PC68CBM-66R | 6 MM | 3/8" | \$ 1.99 | 5 | \$ 9.97 |
| PC68CBM-68R | 6 MM | 1/2" | \$ 3.35 | 5 | \$ 16.77 |
| PC68CBM-82R | 8 MM | 1/8" | \$ 1.42 | 5 | \$ 7.09 |
| PC68CBM-84R | 8 MM | 1/4" | \$ 1.47 | 5 | \$ 7.35 |
| PC68CBM-86R | 8 MM | 3/8" | \$ 1.94 | 5 | \$ 9.71 |
| PC68CBM-88R | 8 MM | 1/2" | \$ 3.62 | 5 | \$ 18.08 |
| PC68CBM-102R | 10 MM | 1/8" | \$ 2.04 | 5 | \$ 10.22 |
| PC68CBM-104R | 10 MM | 1/4" | \$ 2.05 | 5 | \$ 10.27 |
| PC68CBM-106R | 10 MM | 3/8" | \$ 2.05 | 5 | \$ 10.27 |
| PC68CBM-108R | 10 MM | 1/2" | \$ 3.35 | 5 | \$ 16.77 |

**METRIC MALE
ELBOW SWIVEL**



| Part # | Push-In | M Thread | List Price | QTY | Pkg Price |
|--------------|---------|----------|------------|-----|-----------|
| PC69SCBM-4M5 | 4 MM | M 5 | \$ 1.10 | 5 | \$ 5.50 |
| PC69SCBM-4M6 | 4 MM | M 6 | \$ 1.10 | 5 | \$ 5.50 |
| PC69SCBM-6M5 | 6 MM | M 5 | \$ 1.36 | 5 | \$ 6.81 |
| PC69SCBM-6M6 | 6 MM | M 6 | \$ 1.36 | 5 | \$ 6.81 |

**MALE ELBOW SWIVEL
MM X BSPP**



| Part # | Push-In | BSPP | List Price | QTY | Pkg Price |
|---------------|---------|------|------------|-----|-----------|
| PC69SCBM-42G | 4 MM | 1/8" | \$ 1.42 | 5 | \$ 7.09 |
| PC69SCBM-44G | 4 MM | 1/4" | \$ 1.94 | 5 | \$ 9.71 |
| PC69SCBM-62G | 6 MM | 1/8" | \$ 1.54 | 5 | \$ 7.72 |
| PC69SCBM-64G | 6 MM | 1/4" | \$ 2.11 | 5 | \$ 10.53 |
| PC69SCBM-66G | 6 MM | 3/8" | \$ 2.78 | 5 | \$ 13.89 |
| PC69SCBM-68G | 6 MM | 1/2" | \$ 4.40 | 5 | \$ 22.01 |
| PC69SCBM-82G | 8 MM | 1/8" | \$ 2.20 | 5 | \$ 11.02 |
| PC69SCBM-84G | 8 MM | 1/4" | \$ 2.31 | 5 | \$ 11.53 |
| PC69SCBM-86G | 8 MM | 3/8" | \$ 2.93 | 5 | \$ 14.67 |
| PC69SCBM-88G | 8 MM | 1/2" | \$ 4.30 | 5 | \$ 21.50 |
| PC69SCBM-102G | 10 MM | 1/8" | \$ 3.16 | 5 | \$ 15.79 |
| PC69SCBM-104G | 10 MM | 1/4" | \$ 3.31 | 5 | \$ 16.54 |
| PC69SCBM-106G | 10 MM | 3/8" | \$ 3.31 | 5 | \$ 16.54 |
| PC69SCBM-108G | 10 MM | 1/2" | \$ 4.71 | 5 | \$ 23.56 |

**MALE ELBOW SWIVEL
MM X BSPT**



| Part # | Push-In | BSPT | List Price | QTY | Pkg Price |
|---------------|---------|------|------------|-----|-----------|
| PC69SCBM-42R | 4 MM | 1/8" | \$ 1.17 | 5 | \$ 5.85 |
| PC69SCBM-44R | 4 MM | 1/4" | \$ 1.68 | 5 | \$ 8.40 |
| PC69SCBM-62R | 6 MM | 1/8" | \$ 1.54 | 5 | \$ 7.72 |
| PC69SCBM-64R | 6 MM | 1/4" | \$ 1.75 | 5 | \$ 8.77 |
| PC69SCBM-66R | 6 MM | 3/8" | \$ 2.41 | 5 | \$ 12.05 |
| PC69SCBM-68R | 6 MM | 1/2" | \$ 3.67 | 5 | \$ 18.34 |
| PC69SCBM-82R | 8 MM | 1/8" | \$ 1.83 | 5 | \$ 9.17 |
| PC69SCBM-84R | 8 MM | 1/4" | \$ 1.86 | 5 | \$ 9.29 |
| PC69SCBM-86R | 8 MM | 3/8" | \$ 2.57 | 5 | \$ 12.84 |
| PC69SCBM-88R | 8 MM | 1/2" | \$ 3.56 | 5 | \$ 17.82 |
| PC69SCBM-102R | 10 MM | 1/8" | \$ 2.88 | 5 | \$ 14.41 |
| PC69SCBM-104R | 10 MM | 1/4" | \$ 2.86 | 5 | \$ 14.29 |
| PC69SCBM-106R | 10 MM | 3/8" | \$ 2.86 | 5 | \$ 14.29 |
| PC69SCBM-108R | 10 MM | 1/2" | \$ 4.14 | 5 | \$ 20.70 |

**METRIC RUN
TEE SWIVEL**



| Part # | Push-In | M Thread | List Price | QTY | Pkg Price |
|--------------|---------|----------|------------|-----|-----------|
| PC71SCBM-4M5 | 4 MM | M 5 | \$ 1.78 | 5 | \$ 8.91 |

METRIC BRANCH TEE SWIVEL



| Part # | Push-In | M Thread | List Price | QTY | Pkg Price |
|--------------|---------|----------|------------|-----|-----------|
| PC72SCBM-4M5 | 4 MM | M 5 | \$ 1.78 | 5 | \$ 8.91 |

BRANCH TEE SWIVEL MM X BSPT



| Part # | Push-In | BSPT | List Price | QTY | Pkg Price |
|--------------|---------|------|------------|-----|-----------|
| PC72SCBM-84R | 8 MM | 1/4" | \$ 2.48 | 5 | \$ 12.40 |

UNION BULKHEAD



| Part # | Push-In | List Price | QTY | Pkg Price |
|--------------|---------|------------|-----|-----------|
| PC82CBM-44 | 4 MM | \$ 2.43 | 5 | \$ 12.16 |
| PC82CBM-66 | 6 MM | \$ 2.76 | 5 | \$ 13.80 |
| PC82CBM-88 | 8 MM | \$ 3.18 | 5 | \$ 15.91 |
| PC82CBM-1010 | 10 MM | \$ 4.72 | 5 | \$ 23.58 |
| PC82CBM-1212 | 12 MM | \$ 5.87 | 5 | \$ 29.36 |

STEM REDUCER



| Part # | Stem | Push-In | List Price | QTY | Pkg Price |
|-------------|-------|---------|------------|-----|-----------|
| PC97CBM-46 | 4 MM | 6 MM | QUOTE | 5 | QUOTE |
| PC97CBM-64 | 6 MM | 4 MM | \$ 1.40 | 5 | \$ 7.02 |
| PC97CBM-86 | 8 MM | 6 MM | \$ 1.25 | 5 | \$ 6.27 |
| PC97CBM-106 | 10 MM | 6 MM | \$ 1.38 | 5 | \$ 6.92 |
| PC97CBM-108 | 10 MM | 8 MM | \$ 1.82 | 5 | \$ 9.12 |

INLINE FLOW CONTROL



| Part # | Push-In | List Price | QTY | Pkg Price |
|------------|---------|------------|-----|-----------|
| PCSC-4CBM | 4 MM | \$ 5.61 | 5 | \$ 28.05 |
| PCSC-6CBM | 6 MM | \$ 5.37 | 5 | \$ 26.83 |
| PCSC-8CBM | 8 MM | \$ 6.71 | 5 | \$ 33.54 |
| PCSC-10CBM | 10 MM | \$ 7.81 | 5 | \$ 39.04 |
| PCSC-12CBM | 12 MM | \$ 9.24 | 5 | \$ 46.20 |



Servicing Your Pneumatic Needs For Over 40 Years

Features and Specifications for Composite Transition Push to Connect Fittings

The transition fittings will connect your inch tube to a metric thread. These fittings have a BSPT, BSPP and NPT threads. They can be used in a variety of applications such as industrial, robotics, machinery, mobile and instrumentation.

Polyconn's CB composite fittings use a stainless-steel gripping-ring to grip nylon, 95 durometer polyurethane and polyethylene tubing. The nickel plated brass components on the fittings help to provide corrosion resistance and assist in prolonging the life of the fitting. All of the tapered threads come with pre-applied thread sealant and our parallel threads come with a recessed captive o-ring.

The advanced design of the Polyconn push-to-connect fitting places more gripper teeth in the fitting that are independent of the collet. This superior method allows the collet to guide and center the tubing into the fitting teeth on connection. When the need arises to disconnect, simply depress the collet which slides down and pushes the teeth entirely out of the way, disengaging the tubing completely.

SPECIFICATIONS



| TEMPERATURE RANGE | PRESSURE RANGE | VACUUM RATING |
|------------------------------|----------------|---------------|
| 32°F - 140°F (0°C - 60°C) | 0 - 150 PSI | TO -29.5" Hg |

FEATURES

- Collet detents fully retracting gripper teeth.
- An oval collet makes it easier to disengage tubing.
- Custom colored collets available upon request.
- Body material nickel plated brass and black PBT (Polybutylene).
- Locking ring stainless steel.
- O-Ring NBR
- Working pressure 150 PSI.
- Pre-applied thread sealant.

USES

- Industrial
- Robotics
- Machinery
- Mobile
- Instrumentation

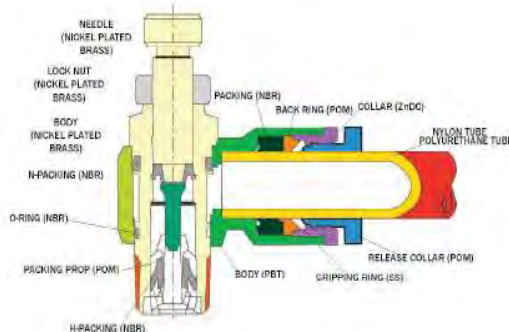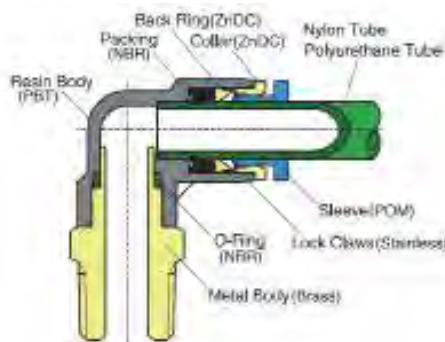

**MALE CONNECTOR
MM X NPT**



| Part # | Push-In | NPT | List Price | QTY | Pkg Price |
|-------------|---------|------|------------|-----|-----------|
| PC68CBT-42 | 4 MM | 1/8" | \$ 1.05 | 5 | \$ 5.26 |
| PC68CBT-44 | 4 MM | 1/4" | \$ 1.59 | 5 | \$ 7.95 |
| PC68CBT-62 | 6 MM | 1/8" | \$ 1.12 | 5 | \$ 5.61 |
| PC68CBT-64 | 6 MM | 1/4" | \$ 1.10 | 5 | \$ 5.52 |
| PC68CBT-66 | 6 MM | 3/8" | \$ 1.78 | 5 | \$ 8.91 |
| PC68CBT-82 | 8 MM | 1/8" | \$ 1.20 | 5 | \$ 6.01 |
| PC68CBT-84 | 8 MM | 1/4" | \$ 1.40 | 5 | \$ 7.02 |
| PC68CBT-86 | 8 MM | 3/8" | \$ 1.75 | 5 | \$ 8.77 |
| PC68CBT-102 | 10 MM | 1/8" | \$ 1.83 | 5 | \$ 9.17 |
| PC68CBT-104 | 10 MM | 1/4" | \$ 1.81 | 5 | \$ 9.03 |
| PC68CBT-106 | 10 MM | 3/8" | \$ 2.15 | 5 | \$ 10.74 |

**MALE CONNECTOR
INCH X BSPP**



| Part # | Push-In | BSPP | List Price | QTY | Pkg Price |
|-------------|---------|------|------------|-----|-----------|
| PC68CBT-12G | 5/32" | 1/8" | \$ 1.30 | 5 | \$ 6.48 |
| PC68CBT-14G | 5/32" | 1/4" | \$ 2.00 | 5 | \$ 10.00 |
| PC68CBT-42G | 1/4" | 1/8" | \$ 1.57 | 5 | \$ 7.84 |
| PC68CBT-44G | 1/4" | 1/4" | \$ 2.11 | 5 | \$ 10.53 |
| PC68CBT-46G | 1/4" | 3/8" | \$ 2.81 | 5 | \$ 14.06 |
| PC68CBT-64G | 3/8" | 1/4" | \$ 2.92 | 5 | \$ 14.60 |
| PC68CBT-66G | 3/8" | 3/8" | \$ 2.92 | 5 | \$ 14.60 |
| PC68CBT-86G | 1/2" | 3/8" | \$ 4.40 | 5 | \$ 21.99 |

**MALE CONNECTOR
INCH X BSPT**



| Part # | Push-In | BSPT | List Price | QTY | Pkg Price |
|-------------|---------|------|------------|-----|-----------|
| PC68CBT-22R | 1/8" | 1/8" | \$ 1.14 | 5 | \$ 5.68 |
| PC68CBT-24R | 1/8" | 1/4" | \$ 1.19 | 5 | \$ 5.94 |
| PC68CBT-42R | 1/4" | 1/8" | \$ 1.22 | 5 | \$ 6.08 |
| PC68CBT-44R | 1/4" | 1/4" | \$ 1.64 | 5 | \$ 8.19 |
| PC68CBT-46R | 1/4" | 3/8" | \$ 2.38 | 5 | \$ 11.88 |
| PC68CBT-62R | 3/8" | 1/8" | \$ 2.33 | 5 | \$ 11.63 |
| PC68CBT-64R | 3/8" | 1/4" | \$ 2.67 | 5 | \$ 13.33 |
| PC68CBT-66R | 3/8" | 3/8" | \$ 2.54 | 5 | \$ 12.70 |

**MALE ELBOW SWIVEL
MM X NPT**



| Part # | Push-In | NPT | List Price | QTY | Pkg Price |
|--------------|---------|------|------------|-----|-----------|
| PC69SCBT-42 | 4 MM | 1/8" | \$ 1.40 | 5 | \$ 7.02 |
| PC69SCBT-44 | 4 MM | 1/4" | \$ 1.45 | 5 | \$ 7.25 |
| PC69SCBT-62 | 6 MM | 1/8" | \$ 1.45 | 5 | \$ 7.25 |
| PC69SCBT-64 | 6 MM | 1/4" | \$ 1.73 | 5 | \$ 8.66 |
| PC69SCBT-66 | 6 MM | 3/8" | \$ 1.89 | 5 | \$ 9.43 |
| PC69SCBT-82 | 8 MM | 1/8" | \$ 1.75 | 5 | \$ 8.77 |
| PC69SCBT-84 | 8 MM | 1/4" | \$ 1.82 | 5 | \$ 9.12 |
| PC69SCBT-86 | 8 MM | 3/8" | \$ 2.15 | 5 | \$ 10.74 |
| PC69SCBT-102 | 10 MM | 1/8" | \$ 2.04 | 5 | \$ 10.22 |
| PC69SCBT-104 | 10 MM | 1/4" | \$ 1.96 | 5 | \$ 9.78 |
| PC69SCBT-106 | 10 MM | 3/8" | \$ 2.10 | 5 | \$ 10.48 |

**MALE ELBOW SWIVEL
MM X BSPP**



| Part # | Push-In | BSPP | List Price | QTY | Pkg Price |
|--------------|---------|------|------------|-----|-----------|
| PC69SCBT-12G | 5/32" | 1/8" | \$ 1.67 | 5 | \$ 8.37 |
| PC69SCBT-14G | 5/32" | 1/4" | \$ 2.33 | 5 | \$ 11.63 |
| PC69SCBT-42G | 1/4" | 1/8" | \$ 1.95 | 5 | \$ 9.73 |
| PC69SCBT-44G | 1/4" | 1/4" | \$ 2.65 | 5 | \$ 13.24 |
| PC69SCBT-46G | 1/4" | 3/8" | \$ 3.30 | 5 | \$ 16.49 |
| PC69SCBT-64G | 3/8" | 1/4" | \$ 4.11 | 5 | \$ 20.54 |
| PC69SCBT-66G | 3/8" | 3/8" | \$ 4.11 | 5 | \$ 20.54 |
| PC69SCBT-86G | 1/2" | 3/8" | \$ 5.73 | 5 | \$ 28.63 |

**MALE ELBOW SWIVEL
MM X BSPT**



| Part # | Push-In | BSPT | List Price | QTY | Pkg Price |
|--------------|---------|------|------------|-----|-----------|
| PC69SCBT-22R | 1/8" | 1/8" | \$ 1.46 | 5 | \$ 7.30 |
| PC69SCBT-24R | 1/8" | 1/4" | \$ 2.00 | 5 | \$ 10.00 |
| PC69SCBT-42R | 1/4" | 1/8" | \$ 1.67 | 5 | \$ 8.37 |
| PC69SCBT-46R | 1/4" | 3/8" | \$ 2.86 | 5 | \$ 14.32 |
| PC69SCBT-62R | 3/8" | 1/8" | \$ 3.46 | 5 | \$ 17.29 |
| PC69SCBT-64R | 3/8" | 1/4" | \$ 3.56 | 5 | \$ 17.82 |
| PC69SCBT-66R | 3/8" | 3/8" | \$ 3.56 | 5 | \$ 17.82 |

**FEMALE BULKHEAD
MM X NPT**



| Part # | Push-In | NPT | List Price | QTY | Pkg Price |
|-------------|---------|------|------------|-----|-----------|
| PC86CBT-104 | 10 MM | 1/4" | \$ 3.07 | 5 | \$ 15.35 |

See our full line of inch and metric tubing on our web site.
www.polyonn.com

Polyconn offers Push-In fittings in many different materials!



Tubing:
Polyconn carries
Polyurethane, Nylon,
Polyethylene and many
more materials to choose
from!

Push to Connect Fittings:
Composite
NSF Acetal Plastic
Nickel Plated Brass
Stainless Steel
D.O.T. Brass
D.O.T Composite

Polyconn® the one-stop shop for your
pneumatic needs.