


## MANUAL VME VALVES – ASSEMBLY DIAGRAM

### NOTES:

- For 5/2 pneumatic operation, assemble a 3/2 NC plunger valve and a 3/2 NO one on the adapter.
- For 5/3 pneumatic operation with open centres, assemble two 3/2 NC plunger valves on the adapter.
- For 5/3 pneumatic operation with pressure centres, assemble two 3/2 NO plunger valves on the adapter.

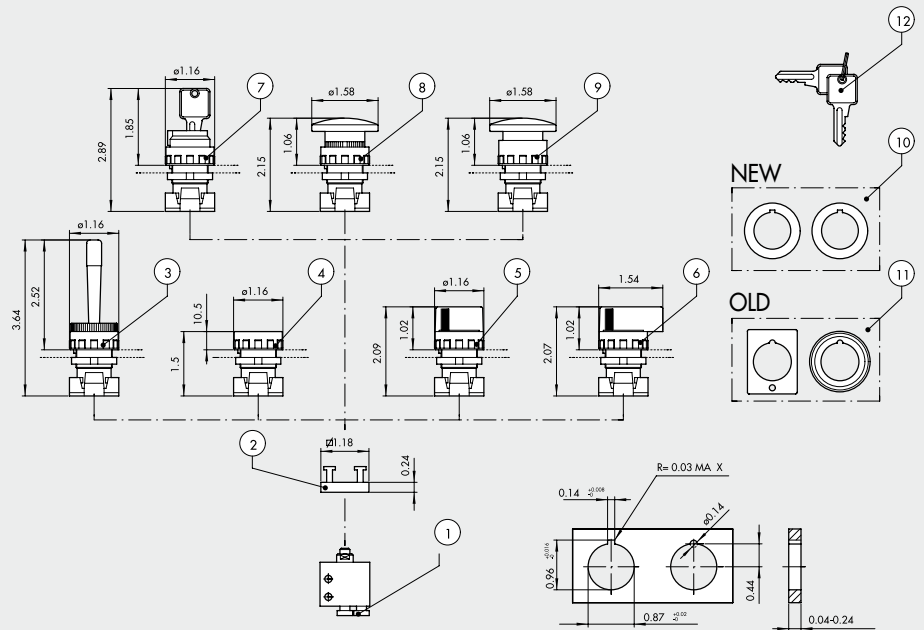

### ORDERING CODES

Symbol	Reference	Code	Description	Weight [lb]
	①	W3501000100	3/2 NC Axial fittings Ø 4 (Ø 5/32)	0.080
		W3501000111	3/2 NC Axial fittings M5	0.080
		W3501000101	3/2 NC Side fittings Ø 4 (Ø 5/32)	0.074
		W3501000111	3/2 NC Side fittings M5	0.074
	①	W3501000101	3/2 NO Axial fittings Ø 4 (Ø 5/32)	0.074
		W3501000110	3/2 NO Axial fittings M5	0.074
		W3501000100	3/2 NO Side fittings Ø 4 (Ø 5/32)	0.074
		W3501000110	3/2 NO Side fittings M5	0.074
	②	0351000050	2 places adaptor thickness 6.8 mm	0.011
	③	W0351000015	Red handler with horizontally pivoted lever	0.055
	④	W0351000011	Fat push button + 2 red/black coloured disks ◆ Bistable fat push button without disk	0.033
	⑤	W0351000030	Black selector short lever at 2 positions with return	0.044
		W0351000031	Black selector short lever at 2 positions	0.044
	⑤	W0351000032	Black selector short lever at 3 positions with return	0.044
		W0351000033	Black selector short lever at 3 positions	0.044
	⑥	W0351000034	Black selector long lever at 2 positions with return	0.057
		W0351000035	Black selector long lever at 2 positions	0.057
	⑥	W0351000036	Black selector long lever at 3 positions with return	0.057
		W0351000037	Black selector long lever at 3 positions	0.057
	⑦	W0351000016	2 positions key selector with extractable key in 2 positions	0.110
		W0351000018	2 positions key selector with extractable key in 0	0.110
	⑧	W0351000013	Red mushroom-head push button Ø 40 mm	0.059
		W0351000017	Black mushroom-head push button Ø 40 mm	0.059
	⑨	W0351000014	Red mushroom-head push button with lock Ø 40 mm	0.063
◆ It can't be supplied. As working replaced by selector with bistable short lever at 2 positions ⑤.	⑩	W0351000049	✦ Reducer from 30 to 22.5 mm	
✦ Usable only with technopolymer body selectors.	⑪	W0351000050	▲ Adapter for bore Ø 30 mm G2326	
▲ Usable only with metal body selectors.	⑫	W0351000021	✦ Key for ESC selectors	
		W0351000056	Green disk for push button ④	